

Trans Technical Solutions

Tel: +27 11 974 9679
 Fax: +27 11 974 9653
 Email: sales@ttsafrica.com

P O Box 5094
 Delmenville
 1403

Unit F11, Roete 24
 Meadowdale
 Germiston



Technical Data | KPEx-0016.3

Dome Head Ex e Stopping Plug



Features


- Suitable for use in Zones 1, 2, 21, 22

Approvals



Certification & Standards

Approved to:	EN/IEC 60079-0, 60079-1, 60079-7, 60079-31, EN60529
EC TYPE Examination Certificate:	Baseefa 08ATEX0325X, IECEx BAS 08.0108X Ex db eb I Mb Ex db eb IIC Gb Ex tb IIIC Db IP65-66 UL1203 (Nickel Plated Brass and Stainless Steel only)
Temperature:	-60°C to +80°C

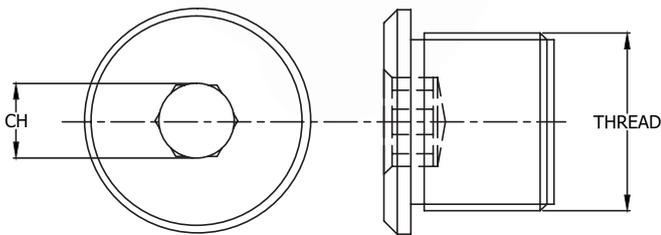

Nickel Plated Brass Part No.	Metric Thread	GID Code	Stainless Steel Part No.	Metric Thread	GID Code	Brass Part No.	Metric Thread	GID Code
TEXN/M16/DSP	M16 x 1.5	7TCA297140R0143	TEXS/M16/DSP	M16 x 1.5	7TCA297140R0116	TEX/M16/DSP	M16 x 1.5	7TCA297140R0132
TEXN/M20/DSP	M20 x 1.5	7TCA297140R0092	TEXS/M20/DSP	M20 x 1.5	7TCA297140R0117	TEX/M20/DSP	M20 x 1.5	7TCA297140R0038
TEXN/M25/DSP	M25 x 1.5	7TCA297140R0096	TEXS/M25/DSP	M25 x 1.5	7TCA297140R0119	TEX/M25/DSP	M25 x 1.5	7TCA297140R0046
TEXN/M32/DSP	M32 x 1.5	7TCA297140R0100	TEXS/M32/DSP	M32 x 1.5	7TCA297140R0428	TEX/M32/DSP	M32 x 1.5	7TCA297140R0054
TEXN/M40/DSP	M40 x 1.5	7TCA297140R0145	TEXS/M40/DSP	M40 x 1.5	7TCA297140R0429	TEX/M40/DSP	M40 x 1.5	7TCA297140R0062
TEXN/M50/DSP	M50 x 1.5	7TCA297140R0146	TEXS/M50/DSP	M50 x 1.5	7TCA297140R0430	TEX/M50/DSP	M50 x 1.5	7TCA297140R0166
TEXN/M63/DSP	M63 x 1.5	7TCA297140R0144	TEXS/M63/DSP	M63 x 1.5	7TCA297140R0431	TEX/M63/DSP	M63 x 1.5	7TCA297140R0164