


Solenoid Connector Interfaces

Solenoid interface dimensions

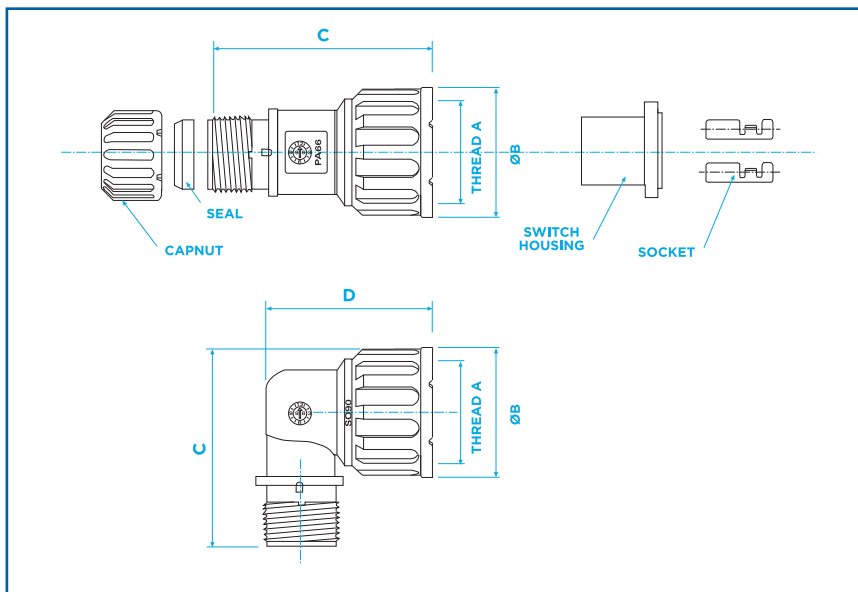

Description

Screw-thread straight and elbow connectable interfaces for circular solenoids, sensors and switches. These fittings are designed for use with all types of unslit conduit thus maintaining maximum conduit bore. See page 58 for details on reducing options which enable each straight fitting to accommodate a variety of conduit sizes.

Accessories

For extending the capability of sealed fittings, consult us for the following: clamping rings, end sleeves/end caps, grommet seals, locknuts, face sealing washers, thread reducers/enlargers.

Nominal dimensions

Part Number	Thread	Nominal Dimensions				Nut Colour
		A	B	C	D	
TSC-M24-90	M24x1.0	31	3	8.5	40.5	Black
TSC-M27-90	M27x1.0	34	4	40	0.5	Grey

*NOTE: dimensions are in mm

Part Number	Thread	Nominal Dimensions				Nut Colour
		A	B	C	D	
TSC-M24-S	M24x1.0	31	53	-	-	Black
TSC-M27-S	M27x1.0	34	54	-	-	Grey

*NOTE: dimensions are in mm

Part Number	Suitable for Connector Type	Number of Pins	Dimensions			
			A	B	C	D
TRSG02	M27	2	25.0	3.5	18.7	23.0
TRSG03	M27	3	25.3	3.5	18.0	21.0
TRSG04	M27	4	25.3	3.5	18.7	23.0
TRSG05	M24	2	22.5	3.5	18.0	23.0
TRSG06	M24	3	22.3	3.5	18.0	21.0

*NOTE: dimensions are in mm

RSGTP01 Socket Part No. (single) TRSGP01 (chain form) TRSGP01-C

