



Connect and Protect

TransTechnical Solutions

Technical Data Sheet

Metallic Systems

TSP Fitting Type M

Technical Characteristics

Conforms to	BSI Kitemark KM-35161 Low voltage directive Inherent Low Fire Hazard
-------------	--

Approvals and Standards



Degree of mechanical protection	High
---------------------------------	------

Degree of protection	IP65 - with all liquid resistant conduit in the series
----------------------	--

UV protection	Very High
---------------	-----------

Fitting characteristics



Straight swivel fitting - Fixed external male thread

Application

For insertion in threaded entries and knockouts using a locknut

Normal operating temperature range

Application	Min Temp	Max Temp
Static	- 50°C	+300°C
Dynamic	- 45°C	+250°C

For use with - Conduit Series

Type TSP & TSN AND TLFH-SP

Fire performance

Test Standard	Performance Rating
EN45545	ILFH
NFF16-101	ILFH
LUL-1085	ILFH
BS6855	ILFH
DIN 5510-2	ILFH



Testing data

See page 5

Type of material

Nickel Plated Brass

Image



011 974 9671

sales@ttsafrica.com

Unit F11, Roete 24, 50 Herman Street, Meadowdale, Germiston, South Africa



Connect and Protect

TransTechnical Solutions


Technical Data Sheet

Metallic Systems

TSP Fitting Type M

Dimensional Data - M Thread

Part No	Thread A	Nominal Dimensions (mm)				F (mm)
		B	C	D	E	
TSP10/M12/M	M12 x 1.5	12.0	20	22	5.7	22.0
TSP12/M16/M	M16 x 1.5	12.0	20	22	8.6	24.0
TSP16/M16/M	M16 x 1.5	12.0	21	24	10.3	25.4
TSP16/M20/M	M20 x 1.5	12.0	21	28	10.3	25.4
TSP20/M20/M	M20 x 1.5	12.0	19	25.4	14.3	28.5
TSP25/M25/M	M25 x 1.5	15.0	28	32	17.6	35.0
TSP32/M32/M	M32 x 1.5	15.0	31	38	24.0	42.0
TSP40/M40/M	M40 x 1.5	16.0	38	50	33.0	52.0
TSP50/M50/M	M50 x 1.5	18.0	41	60	38.5	60.0
TSP63/M63/M	M63 x 1.5	25.0	41	70	50.0	70.0

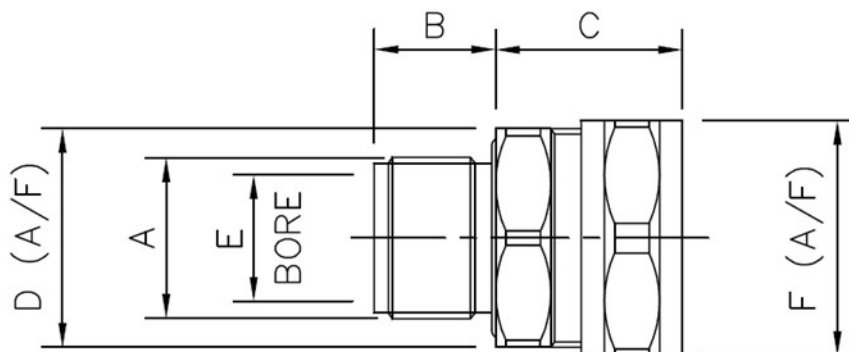

011 974 9671

sales@ttsafrica.com

Unit F11, Roete 24, 50 Herman Street, Meadowdale, Germiston, South Africa



Connect and Protect

TransTechnical Solutions


Technical Data Sheet

Metallic Systems

TSP Fitting Type M

Dimensional Data - PG Thread (On Request)

Part No	Thread A	Nominal Dimensions (mm)				F (mm)
		B	C	D	E	
TSP10/PG7/M	PG7	11.0	46	20	5.7	22.0
TSP12/PG9/M	PG9	11.0	20	22	8.1	24.0
TSP16/PG11/M	PG11	11.0	20	24	10.3	25.4
TSP16/PG13/M	PG13.5	11.0	21	24	10.3	25.4
TSP20/PG16/M	PG16	11.0	21	25.4	14.3	28.5
TSP25/PG21/M	PG21	12.0	28	32	17.6	35.0
TSP32/PG29/M	PG29	12.0	31	38	24.0	42.0
TSP40/PG36/M	PG36	16.0	38	56	33.0	52.0
TSP50/PG42/M	PG42	18.0	41	60	38.5	60.0
TSP63/PG48/M	PG48	25.0	46	70	50.0	70.0

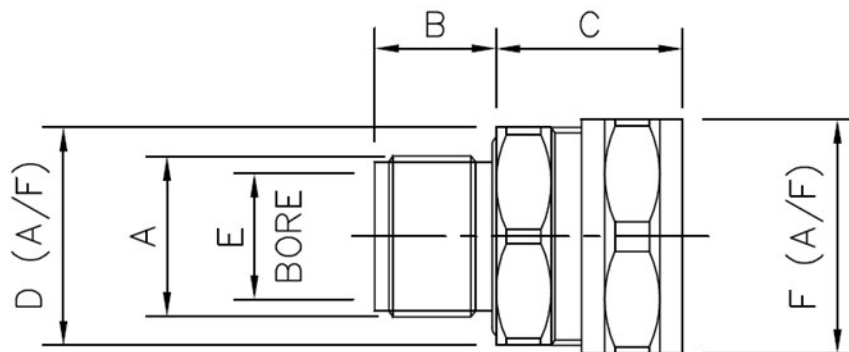

011 974 9671

sales@ttsafrica.com

Unit F11, Roete 24, 50 Herman Street, Meadowdale, Germiston, South Africa



Connect and Protect

TransTechnical Solutions


Technical Data Sheet

Metallic Systems

TSP Fitting Type M

Dimensional Data - NPT Thread (On Request)

Part No	Thread A	Nominal Dimensions (mm)				F (mm)
		B	C	D	E	
TSP16/038/M	NPT 3/8"	11.0	21	24	10.3	24.4
TSP20/050M	NPT 1/2"	15.0	19	25.4	14.3	28.5
TSP25/075/M	NPT 3/4"	16.0	28	32	17.6	35.0
TSP32/100/M	NPT 1"	19.0	31	38	24.0	42.0
TSP40/125/M	NPT 1 1/4"	20.0	34	50	33.0	52.0
TSP50/150/M	NPT 1 1/2"	21.0	41	60	38.5	60.0

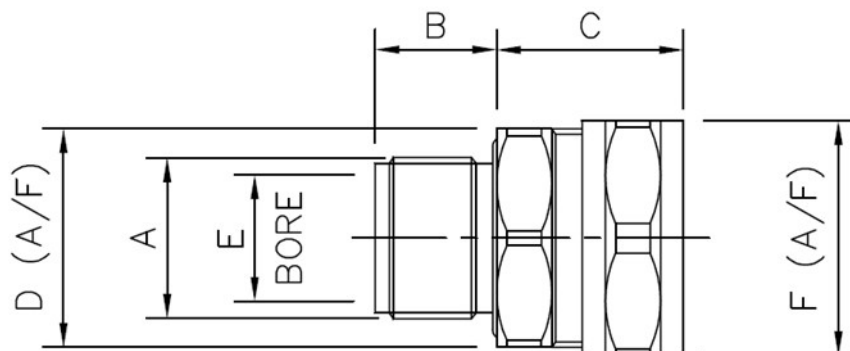

011 974 9671

sales@ttsafrica.com

Unit F11, Roete 24, 50 Herman Street, Meadowdale, Germiston, South Africa



Connect and Protect

TransTechnical Solutions

Technical Data Sheet

Metallic Systems

TSP Fitting Type M

Chemical Resistance Chart

Key:				
Suitable :	●			
Limited Suitability :	●			
Unsuitable :	●			
Not Tested :	●			
	● Astm No.1	● Diesel oil	● Methyl Bromide	● Sulphur Dioxide (Gas)
	● Astm No.2	● Diethylamine	● MEK	● Sulphuric Acid (10%)
	● Astm No.3	● Ethanol	● Nitric Acid (10%)	● Sulphuric Acid (70%)
	● Acetic Acid (10%)	● Ether	● Nitric Acid (70%)	● Toluene
	● Acetone	● Ethylamine	● Oxalic Acid	● Transformer Oil
	● Aluminium Chloride	● Ethylene Glycol	● Ozone (Gas)	● 1,1,1-Trichloroethane
	● Aniline	● Ethyl Ethanoate	● Paraffin oil	● Trichloroethylene
	● Benzaldehyde	● Freon 32	● Petrol	● Turpentine
	● Benzene	● Hydrochloric Acid (10%)	● Phenol	● Vegetable Oil
	● Carbon tetrachloride	● Hydrochloric Acid (36%)	● Sea Water	● Vinyl Acetate
	● Chlorine water	● Hydrogen Peroxide (35%)	● Silver Nitrate	● Water
	● Chloroform	● Hydrogen Peroxide (87%)	● Skydrol	● White Spirit
	● Citric Acid	● Lactic Acid	● Sodium Chloride	● Zinc Chloride
	● Copper Sulphate	● Lubricating oil	● Sodium Hydroxide (10%)	
	● Cresol	● Methanol	● Sodium Hydroxide (60%)	

ADHERENCE TO THE CURRENT WIRING REGULATIONS BS7671 OR NEC WIRING REGULATIONS (FOR USA) IS STRONGLY ADVISED.

MINIMUM BEND RADIUS FOR FLEXING IS DEPENDANT UPON MINIMUM TEMPERATURE, BENDING FREQUENCY AND CHEMICAL ENVIRONMENT.

Chemical Resistance Chart

Metric	Standard thread conforming to EN60423 & BS3643			PG	German Standard thread conforming to DIN40430			NPT	US taper seal pipe thread conforming to ANSI/ASME B1.20.1-1983	
Thread Size mm	Ext Thread Outside Diameter	Int Thread Inside Diameter	Pitch	Thread Size	Ext Thread Outside Diameter	Int Thread Inside Diameter	Pitch	Thread Size Inch	Ext Thread Outside Diameter	Pitch
M10	10.0	8.9	1.0	PG7	12.5	11.3	1.27	-	-	-
M12	12.0	10.4	1.5	PG9	15.2	13.9	1.41	3/8"	16.7	1.14
M16	16.0	14.4	1.5	PG11	18.6	17.3	1.41	1/2"	21	1.81
M20	20.0	18.4	1.5	PG13.5	20.4	19.1	1.41	3/4"	26.4	1.81
M25	25.0	23.4	1.5	PG16	22.5	21.2	1.41	1"	33.3	2.21
M32	32.0	30.4	1.5	PG21	28.3	26.8	1.59	1 1/4"	41.9	2.21
M40	40.0	38.4	1.5	PG29	37.0	35.5	1.59	1 1/2"	47.8	2.21
M50	50.0	48.4	1.5	PG36	47.0	45.5	1.59	2"	59.6	2.21
M63	63.0	61.4	1.5	PG42	54.0	52.2	1.59	-	-	-
M75	75.0	73.4	1.5	PG48	59.3	57.8	1.59	-	-	-

011 974 9671

sales@ttsafrica.com

Unit F11, Roete 24, 50 Herman Street, Meadowdale, Germiston, South Africa