

Conduit Systems - Fittings

Type CGS - Cable Glands Metric and PG Thread

Technical Characteristics

Conforms to	CE Mark to the low voltage directive RoHS Compliant to 2011/65/EU Conforms with end of life vehicle directive (ELV) EU200/53/EC											
Approvals and Standards	CE 											
Degree of mechanical protection	Medium											
Degree of protection	IP68 - 5 bar 30 minutes ONLY											
UV protection	Very High (Black)											
Finish	Black (BL)											
Application	Straight compression type cable glands IP68 5 bar (for 30 minutes only) incorporating fixed male threads to provide secure cable connections through knockouts and threaded entries.											
Normal operating temperature range	<table><tr><td>Application</td><td>Min Temp</td><td>Max Temp</td></tr><tr><td>Static</td><td>- 40°C</td><td>+120°C</td></tr><tr><td>Dynamic</td><td>- 5°C</td><td>+120 °C</td></tr></table>			Application	Min Temp	Max Temp	Static	- 40°C	+120°C	Dynamic	- 5°C	+120 °C
Application	Min Temp	Max Temp										
Static	- 40°C	+120°C										
Dynamic	- 5°C	+120 °C										
For use with - Conduit range	For use with all Conduits in the H-flex range											
Fire performance	Test Standard Not rated	Performance Rating Not rated	Self Extinguishing Low smoke toxicity & Halogen Free									
Chemical resistance & Storage data	Click or See page 3											
Type of material	Polyamide (Nylon) PA 66 - heat and UV stabilised & Seal (TPE) Thermoplastic elastomer											

Image




Conduit Systems - Fittings

Type CGS - Cable Glands Metric and PG Thread

Technical & Dimensional Data

Metric / PG Part Number	Thread	Cable O/D Range	Nominal dimensions (mm)			
	A	B	C	D	E	F
TCGS-M16	M16x1.5	4.0 - 10.0	9	34.5	21	23.5
TCGS-M20	M20x1.5	6.0 - 12.0	10	37	24	27
TCGS-M25	M25x1.5	13.0 - 18.0	11	40	30	33
TCGS-M32	M32x1.5	17.0 - 25.0	12	49	41	45.5
TCGS-M40	M40x1.5	24.0 - 32.0	13	55	50	55.5
TCGS-M50	M50x1.5	24.0 - 38.5	12	65	60	68
TCGS-M63	M63x1.5	35.0 - 44.0	12	67	70	79
TCGS-PG07	PG7	2.0 - 6.5	8	31	17	19
TCGS-PG09	PG9	4.0 - 10.0	8	33.5	21	23.5
TCGS-PG11	PG11	6.0 - 12.0	8	35	24	27
TCGS-PG13	PG13.5	6.0 - 12.0	9	36	24	27
TCGS-PG16	PG16	10.0 - 14.0	10	38.5	27	30
TCGS-PG21	PG21	13.0 - 18.0	11	40	30	33
TCGS-PG29	PG29	17.0 - 25.0	11	48	41	45.5
TCGS-PG36	PG36	24.0 - 32.0	13	55	50	55.5

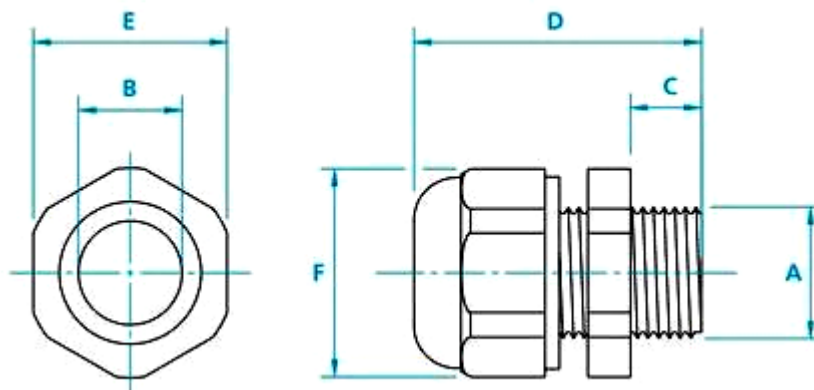

Conduit Systems - Fittings

Type CGS - Cable Glands Metric and PG Thread

Chemical Resistance Chart

Key:

Suitable :



Limited Suitability :



Unsuitable :



Not Tested :



Astm No.1	Diesel oil	Methyl Bromide	Sulphur Dioxide (Gas)
Astm No.2	Diethylamine	MEK	Sulphuric Acid (10%)
Astm No.3	Ethanol	Nitric Acid (10%)	Sulphuric Acid (70%)
Acetic Acid (10%)	Ether	Nitric Acid (70%)	Toluene
Acetone	Ethylamine	Oxalic Acid	Transformer Oil
Aluminium Chloride	Ethylene Glycol	Ozone (Gas)	1,1,1-Trichloroethane
Aniline	Ethyl Ethanoate	Paraffin oil	Trichloroethylene
Benzaldehyde	Freon 32	Petrol	Turpentine
Benzene	Hydrochloric Acid (10%)	Phenol	Vegetable Oil
Carbon tetrachloride	Hydrochloric Acid (36%)	Sea Water	Vinyl Acetate
Chlorine water	Hydrogen Peroxide (35%)	Silver Nitrate	Water
Chloroform	Hydrogen Peroxide (87%)	Skydrol	White Spirit
Citric Acid	Lactic Acid	Sodium Chloride	Zinc Chloride
Copper Sulphate	Lubricating oil	Sodium Hydroxide (10%)	
Cresol	Methanol	Sodium Hydroxide (60%)	

The information above is given as a guide only and is based on published technical data and experience. The chemical resistance of the above products is dependant on factors such as chemical exposure, concentration of the chemical and temperature. The above chemicals are valid for a temperature of 23°C. Use of the above table is at the users own discretion and risk. Those using it must satisfy themselves that their application presents no health and safety risks. The end user should assess compatibility with their application and contact TTS for further information.

ADHERENCE TO THE CURRENT WIRING REGULATIONS BS7671 OR NEC WIRING REGULATIONS (FOR USA) IS STRONGLY ADVISED.

MINIMUM BEND RADIUS FOR FLEXING IS DEPENDANT UPON MINIMUM TEMPERATURE, BENDING FREQUENCY AND CHEMICAL ENVIRONMENT.

Storage Guidelines

To maintain balanced moisture content, H-flex recommends storing products under the following conditions:

Storage temp.	Installation temp.	Rel. humidity
18°C to 30°C	>18°C	>30%

In the very dry winter months the moisture balance may go down slightly as the material releases moisture to the environment (owing to lower relative humidity).

Compared to natural outdoor conditions* at around 0°C (40 ... 80% rh), the humidity in heated rooms may drop by half to below 20% rh if no humidification is present. (Even extremely dry regions such as the Sahara Desert record average humidity of 20% to 60% rh.) (*Central European climate.)

If products from an outside environment are brought into a heated processing area, the change in climate may suddenly cause temporary de-moisturisation around the edges. After 24 hours in the processing area a natural balance will be restored.

Observing this storage recommendation ensures optimum process-ability and material properties.