



Nylon Dome Stopper Plugs




Material:	Body and Locknut: Polyamide 66 (Nylon) Sealing ring: NBR Rubber
Colours:	Black. (Other colours available although subject to MOQ)
Approvals:	ISO90001, TUV, RoHS
Protection Degree:	IP68
Flammability:	UL94 V-2
Operating Temperature:	Static: -40°C to 100°C, short time up to 120°C. Dynamic: -20°C to 80°C, short time up to 100°C
Key Features:	Excellent water resistance, high flexibility, good insulation, high crushing resistance, corrosion resistant, UV resistant.

TransTechnical Solutions

Protect and Connect



ttsafrica.com

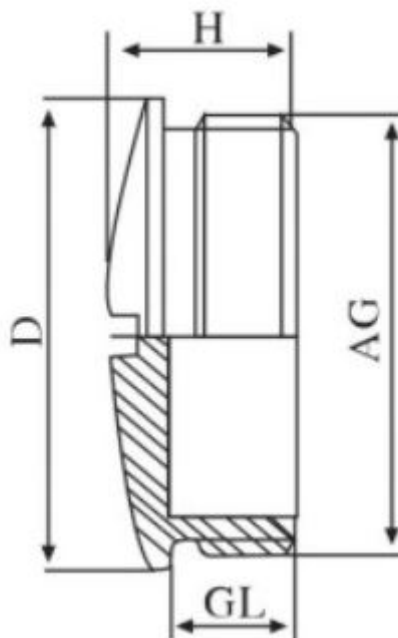

TTS Part Number	Thread O.D. AG(mm)	Thread Size	Thread Length GL(mm)	Main Body Dimensions H(mm)	Cover Dimension D(mm)	Packet Size
TDSP/M12/N	12	M12*1.5	8.5	12.5	15	10
TDSP/M16/N	16	M16*1.5	8.5	13	19	10
TDSP/M20/N	20	M20*1.5	9	13	25	10
TDSP/M25/N	25	M25*1.5	10.5	15.5	30	10
TDSP/M32/N	32	M32*1.5	10.5	16	38	2
TDSP/M40/N	40	M40*1.5	11.5	16	46	2
TDSP/M50/N	50	M50*1.5	13.5	18	56	1
TDSP/M63/N	63	M63*1.5	14	19	68	1

Transtech Solutions (pty) Ltd

Unit F11 Roete 24, 50 Herman Street, Meadowdale, Germiston

PO Box 5094 Delmenville, Germiston 1403

t: +27 11 974 9679

www.ttsafrica.com

