

TempGuard Interfaces

Deutsch DT Series Connector Interface

Technical Characteristics

Conforms to	CE Mark to the low voltage directive RoHS Compliant to 2011/65/EU Conforms with end of life vehicle directive (ELV) EU200/53/EC			
Approvals and Standards	CE 			
Degree of mechanical protection	High			
Degree of protection	IP40 - Hinged Connector Interface fittings			
UV protection	Medium			
Finish	Dark Orange			
Application	Single junction straight and 90° elbow fittings providing high integrity connections between Deutsch DT connectors and H-flex conduit systems. In addition, 90° elbow versions allow the conduit to swivel 360° around the connector housing, sufficient to avoid the problems associated with one-piece interfaces of overflexing due to movement or vibration.			
Normal operating temperature range	Minimum Temperature	Permanent Max Temperature	Long Term Max Temperature (30,000 Hrs)	Short Term Max Temperature (3000 Hrs)
	-40°C	+160°C	+185°C	+200°C
For use with - Conduit range	Full TempGuard system protection is achieved using these fittings with HTC conduit. Compatible with all H-flex conduits.			
Fire Performance	Test Standard	Performance Rating		
	UL94	V2		
	UL94 RTI	150 (Elec)		
Chemical resistance & Storage data	See page 4			
Type of material	High Temperature Polyamide (Nylon) - Low Smoke and Halogen Free			
Image				

TempGuard Interfaces

Deutsch DT Series Straight Interface


Dimensional Data & Part Number

Straight Interface * Stocked Items	A	B	C	D	Conduit Size (NC)	Conduit Size (NW)	Deutsch - Reference
TCIH08-DT2	26.0	16.0	18	7	08	7.5	DT 2-way
TCIH08-DT3	30.0	22.0	24	12	08	7.5	DT 3-way
TCIH08-DT4	42.0	18.0	27	12	08	7.5	DT 4-way
TCIH12-DT2	26.0	16.0	18	7	12	10	DT 2-way
TCIH12-DT3	29.0	22.0	24	7	12	10	DT 3-way
TCIH12-DT4	40.0	18.0	27	7	12	10	DT 4-way
TCIH12-DT6	40.0	22.0	27	10	12	10	DT 6-way
TCIH12-DT8	40.0	25.0	30	10	12	10	DT 8-way
Straight Interface ** Made to Order	A	B	C	D	Conduit Size (NC)	Conduit Size (NW)	Deutsch - Reference
TCIH08-DT6	42.0	22.0	27	12	08	7.5	DT 6-way
TCIH16-DT12	44.0	24.0	40	10	16	13	DT 12-way

Note : Nominal Dimensions are in mm

* Part numbers listed are stocked items available for immediate order

** Parts numbers listed are available to order but not stocked items, and would therefore be subject to manufacturing leadtime.

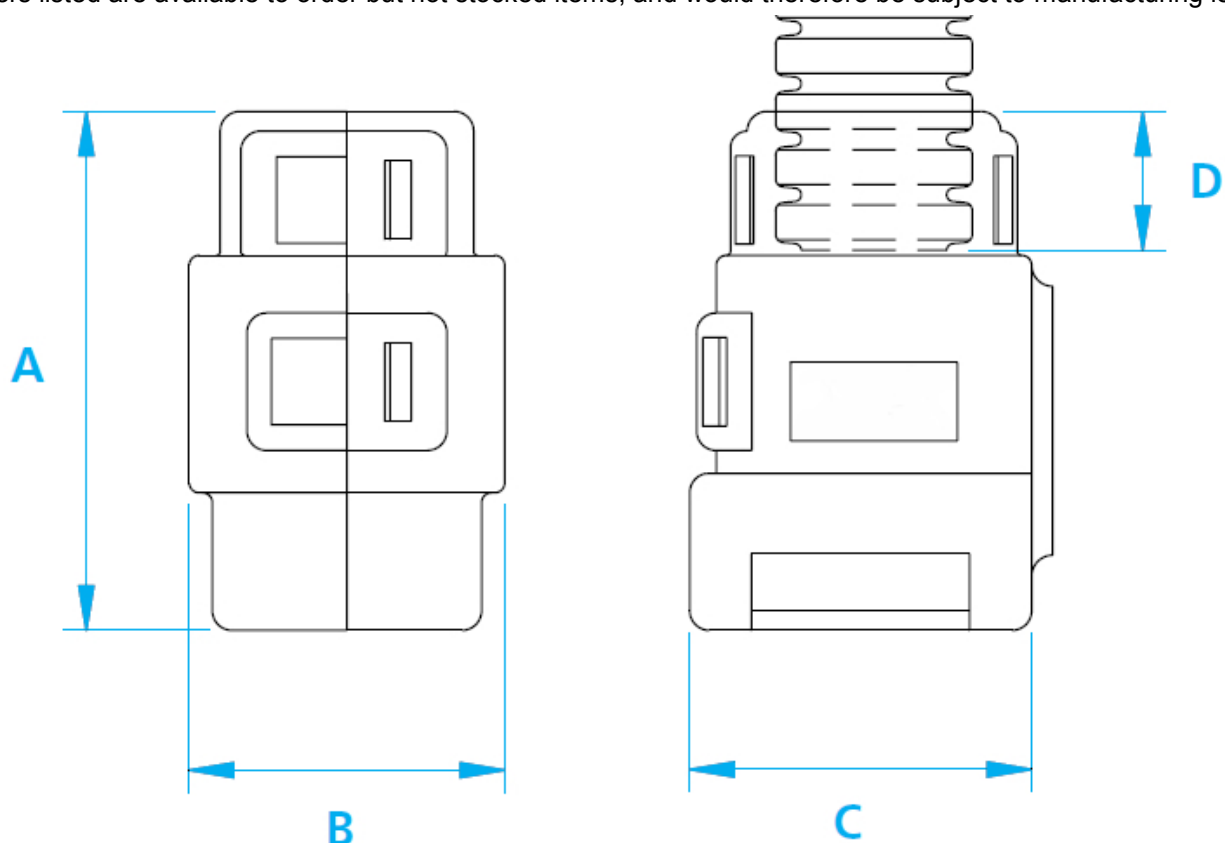

TempGuard Interfaces

Deutsch DT Series 90° Elbow Interface


Dimensional Data & Part Number

90° Elbow Interface * Stocked Items	A	B	C	D	Conduit Size (NC)	Conduit Size (NW)	Deutsch - Reference
TCIH08-90-DT2	36.0	30.0	19	7	08	7.5	DT 2-way
TCIH08-90-DT4	48.0	30.0	25	7	08	7.5	DT 4-way
TCIH12-90-DT2	36.0	30.0	19	7	12	10	DT 2-way
90° Elbow Interface ** Made to order	A	B	C	D	Conduit Size (NC)	Conduit Size (NW)	Deutsch - Reference
TCIH08-90-DT3	44.0	30.0	23	7	08	7.5	DT 3-way
TCIH08-90-DT6	48.0	34.0	25	7	08	7.5	DT 6-way
TCIH12-90-DT3	44.0	30.0	23	7	12	10	DT 3-way
TCIH12-90-DT4	48.0	30.0	25	7	12	10	DT 4-way
TCIH12-90-DT6	48.0	34.0	25	7	12	10	DT 6-way
TCIH12-90-DT8	63.0	37.0	30	10	12	10	DT 8-way
TCIH12-90-DT12	68.0	36.0	38	10	12	10	DT 12-way
TCIH16-90-DT8	63.0	37.0	30	10	16	13	DT 8-way
TCIH16-90-DT12	68.0	36.0	38	10	16	13	DT 12-way

Note : Nominal Dimensions are in mm

* Part numbers listed are stocked items available for immediate order

** Parts numbers listed are available to order but not stocked items, and would therefore be subject to manufacturing leadtime.

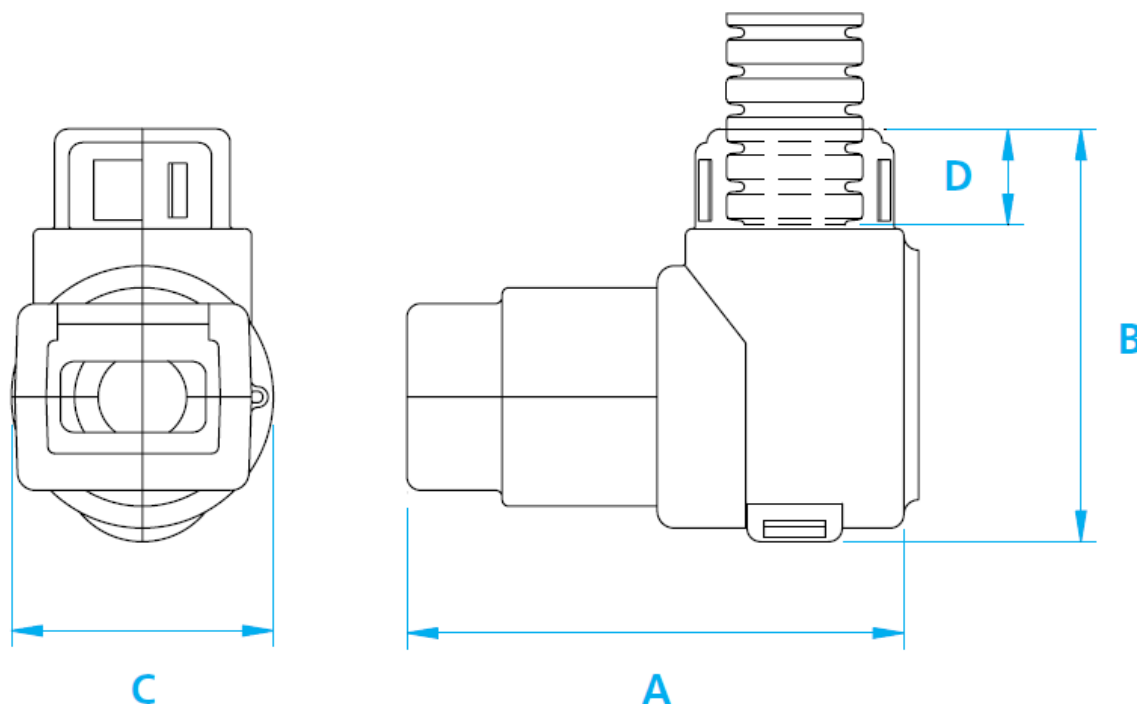

TempGuard Interfaces

Deutsch DT Series Connector Interface

Chemical Resistance Chart

Key:

Suitable :



Limited Suitability :



Unsuitable :



Not Tested :



Astm No.1	Diesel oil	Methyl Bromide	Sulphur Dioxide (Gas)
Astm No.2	Diethylamine	MEK	Sulphuric Acid (10%)
Astm No.3	Ethanol	Nitric Acid (10%)	Sulphuric Acid (70%)
Acetic Acid (10%)	Ether	Nitric Acid (70%)	Toluene
Acetone	Ethylamine	Oxalic Acid	Transformer Oil
Aluminium Chloride	Ethylene Glycol	Ozone (Gas)	1,1,1-Trichloroethane
Aniline	Ethyl Ethanoate	Paraffin oil	Trichloroethylene
Benzaldehyde	Freon 32	Petrol	Turpentine
Benzene	Hydrochloric Acid (10%)	Phenol	Urea
Carbon tetrachloride	Hydrochloric Acid (36%)	Sea Water	Uric Acid
Chlorine water	Hydrogen Peroxide (35%)	Silver Nitrate	Vegetable Oil
Chloroform	Hydrogen Peroxide (87%)	Skydrol	Vinyl Acetate
Citric Acid	Lactic Acid	Sodium Chloride	Water
Copper Sulphate	Lubricating oil	Sodium Hydroxide (10%)	White Spirit
Cresol	Methanol	Sodium Hydroxide (60%)	Zinc Chloride

The information above is given as a guide only and is based on published technical data and experience. The chemical resistance of the above products is dependant on factors such as chemical exposure, concentration of the chemical and temperature. The above chemicals are valid for a temperature of 23°C. Use of the above table is at the users own discretion and risk. Those using it must satisfy themselves that their application presents no health and safety risks. The end user should assess compatibility with their application and contact TTS for further information.

ADHERENCE TO THE CURRENT WIRING REGULATIONS BS7671 OR NEC WIRING REGULATIONS (FOR USA) IS STRONGLY ADVISED.

MINIMUM BEND RADIUS FOR FLEXING IS DEPENDANT UPON MINIMUM TEMPERATURE, BENDING FREQUENCY AND CHEMICAL ENVIRONMENT.

Storage Guidelines

To maintain balanced moisture content, H-flex recommends storing products under the following conditions:

Storage temp. 18°C to 30°C	Installation temp. >18°C	Rel. humidity >30%
--------------------------------------	------------------------------------	------------------------------

If products from an outside environment are brought into a heated processing area, the change in climate may suddenly cause temporary de-moisturisation around the edges. After 24 hours in the processing area a natural balance will be restored.

Observing this storage recommendation ensures optimum process-ability and material properties.