

Metallic Systems

SPL Type C45

Technical Characteristics


Conforms to	BSI Kitemark KM-35161 UL514B file number E60625 CE mark to the Low Voltage Directive		
Approvals and Standards	  		
Degree of mechanical protection	Very High		
Degree of protection	IP67, IP68 & IP69k - with all liquid tight conduit in the series		
UV protection	Very High		
Fitting characteristics	45° combined fitting & elbow		
Application	For insertion into threaded entries & knockouts using a locknut to secure		
Normal operating temperature range	Application	Min Temp	Max Temp
	Static	- 65°C	+150°C
	Dynamic	- 45°C	+150°C
For use with - Conduit series	Type SPL , SPL-EF , SPLHC & SPUL		
Fire performance	Test Standard	Performance Rating	
	Not Rated	Not Rated	
Testing data	Click or see page 4		
Type of material	Nickel Plated Brass body, back nut & insert. High temperature co-polyester seal, NBR face seal, Nylon cable protection insert		
Image			

Metallic Systems

SPL Type C45

Dimensional Data

Part No Metric Thread	Thread A	Nominal Dimensions (mm)						
		B	C	D	E	F	G	H
TSPL16/M16/C45	M16 x 1.5	16	54.0	41.0	22.0	25.4	10.4	13.1
TSPL16/M20/C45	M20 x 1.5	16	55.0	40.5	22.0	25.4	10.5	14.6
TSPL20/M20/C45	M20 x 1.5	20	58.0	46.5	27.0	28.6	14.0	14.3
TSPL25/M25/C45	M25 x 1.5	25	65.6	54.7	33.0	35.0	18.2	14.3
TSPL32/M32/C45	M32 x 1.5	32	85.0	71.7	42.0	42.0	24.1	17.6
TSPL40/M40/C45	M40 x 1.5	40	93.8	81.1	51.0	52.0	32.7	17.6
TSPL50/M50/C45	M50 x 1.5	50	106.5	93.0	60.0	60.0	37.7	19.5
TSPL63/M63/C45	M63 x 1.5	63	125.1	112.0	74.0	70.0	48.4	23.1

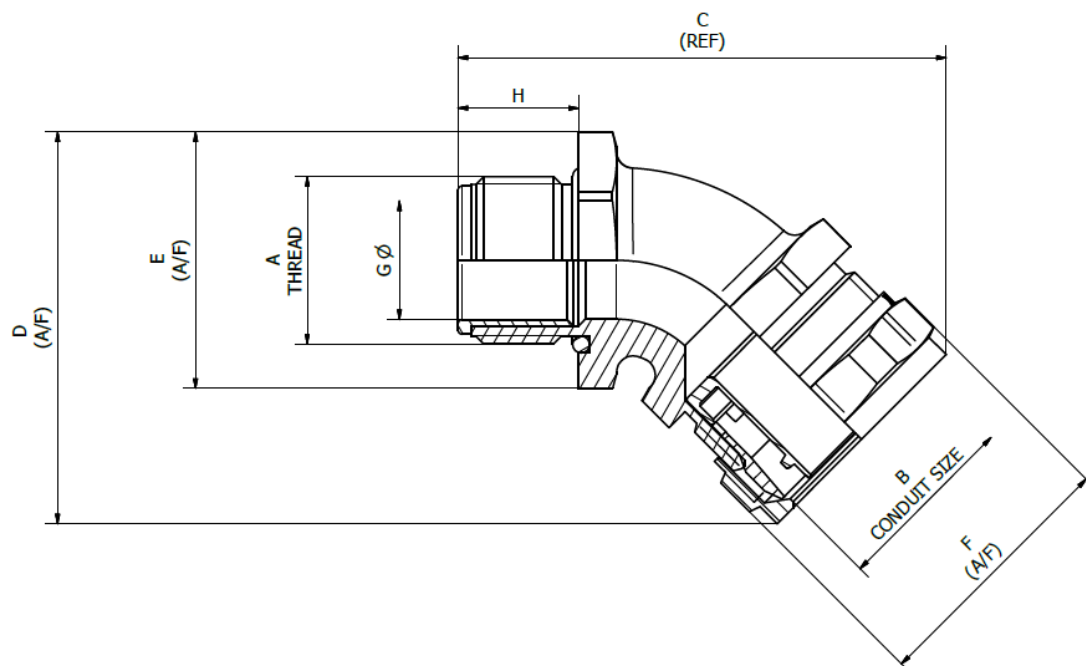

Metallic Systems

SPL Type C45

Chemical Resistance Chart

Key:

Suitable :



Limited Suitability :



Unsuitable :



Not Tested :



Astm No.1	Diesel oil	Methyl Bromide	Sulphur Dioxide (Gas)
Astm No.2	Diethylamine	MEK	Sulphuric Acid (10%)
Astm No.3	Ethanol	Nitric Acid (10%)	Sulphuric Acid (70%)
Acetic Acid (10%)	Ether	Nitric Acid (70%)	Toluene
Acetone	Ethylamine	Oxalic Acid	Transformer Oil
Aluminium Chloride	Ethylene Glycol	Ozone (Gas)	1,1,1-Trichloroethane
Aniline	Ethyl Ethanoate	Paraffin oil	Trichloroethylene
Benzaldehyde	Freon 32	Petrol	Turpentine
Benzene	Hydrochloric Acid (10%)	Phenol	Vegetable Oil
Carbon tetrachloride	Hydrochloric Acid (36%)	Sea Water	Vinyl Acetate
Chlorine water	Hydrogen Peroxide (35%)	Silver Nitrate	Water
Chloroform	Hydrogen Peroxide (87%)	Skydrol	White Spirit
Citric Acid	Lactic Acid	Sodium Chloride	Zinc Chloride
Copper Sulphate	Lubricating oil	Sodium Hydroxide (10%)	
Cresol	Methanol	Sodium Hydroxide (60%)	

The information above is given as a guide only and is based on published technical data and experience. The chemical resistance of the above products is dependant on factors such as chemical exposure, concentration of the chemical and temperature. The above chemicals are valid for a temperature of 23°C. Use of the above table is at the users own discretion and risk. Those using it must satisfy themselves that their application presents no health and safety risks. The end user should assess compatibility with their application and contact TTS for further information.

ADHERENCE TO THE CURRENT WIRING REGULATIONS BS7671 OR NEC WIRING REGULATIONS (FOR USA) IS STRONGLY ADVISED.

MINIMUM BEND RADIUS FOR FLEXING IS DEPENDANT UPON MINIMUM TEMPERATURE, BENDING FREQUENCY AND CHEMICAL ENVIRONMENT.

Thread Data

Metric	Standard thread conforming to EN60423 & BS3643			NPT	US taper seal pipe thread conforming to ANSI/ASME B1.20.1-1983	
Thread Size mm	Ext Thread Outside Diameter	Int Thread Inside Diameter	Pitch	Thread Size Inch	Ext Thread Outside Diameter	Pitch
M10	10.0	8.9	1.0	-	-	-
M12	12.0	10.4	1.5	3/8"	16.7	1.14
M16	16.0	14.4	1.5	1/2"	21.0	1.81
M20	20.0	18.4	1.5	3/4"	26.4	1.81
M25	25.0	23.4	1.5	1"	33.3	2.21
M32	32.0	30.4	1.5	1 1/4"	41.9	2.21
M40	40.0	38.4	1.5	1 1/2"	47.8	2.21
M50	50.0	48.4	1.5	2"	59.6	2.21
M63	63.0	61.4	1.5			
M75	75.0	73.4	1.5			