

Commercial Grade Heat Shrink Marker Sleeve 2:1 and 3:1

Product Introduction:

Commercial Grade Heat Shrink Marker Sleeve is made from flame retarded, radiation cross-linked heat-shrinkable polyolefin. It is designed to meet the wire identification needs of commercial and industrial customers such as communications, wire assemblies, electrical panels and Oil & Gas Control systems.

Features:

- Thermal transfer printable in single sided or double sided
- 2:1 or 3:1 shrink ratio
- Supplied in a "Ladder Format" or "Continuous Length"
- Scoring is available if request in advance.

Operating temperature	Minimum shrink temperature	Minimum full recovery temperature
-55°C to +125°C	70°C	120 °C

Standard Color:

White, Yellow.


Specifications:

UL 224

SAE-AS 81531

MIL-STD-202F/Method

215J RoHS/REACH

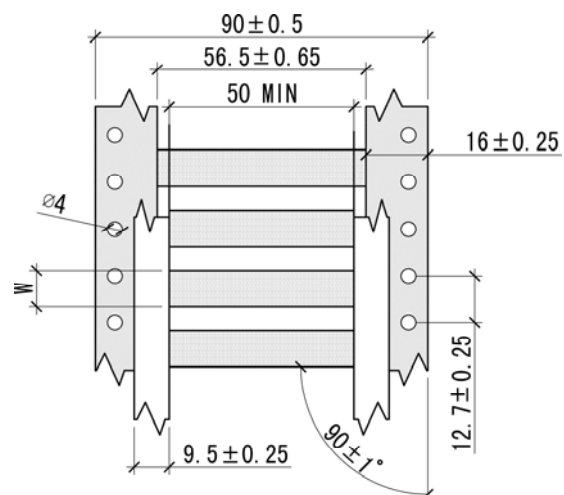

Commercial Grade Heat Shrink Marker Sleeve 2:1 and 3:1

Dimensions:

Part Number	Size (mm)	Before Shrink (mm)			After Shrink (mm)		Packing Options	
	mm	I.D.	Flat Width	Double Wall Thickness	I.D.	Single Wall Thickness	M/Reel	PCS/Box
Shrink Ratio: 2:1								
THSS-GP2-1.6	1.6	2.00±0.20	3.7±0.3	0.48±0.10	≤0.79	0.45±0.06	100	250
THSS-GP2-2.4	2.4	2.79±0.20	5.0±0.3	0.48±0.10	≤1.18	0.49±0.06	100	250
THSS-GP2-3.2	3.2	3.64±0.23	6.3±0.4	0.48±0.10	≤1.59	0.51±0.06	100	250
THSS-GP2-4.8	4.8	5.26±0.25	8.9±0.4	0.48±0.10	≤2.36	0.54±0.06	100	250
THSS-GP2-6.4	6.4	6.92±0.28	11.5±0.4	0.50±0.10	≤3.18	0.56±0.06	100	250
THSS-GP2-9.5	9.5	10.2±0.32	16.7±0.5	0.51±0.11	≤4.75	0.59±0.06	100	250
THSS-GP2-12.7	12.7	13.5±0.36	21.8±0.6	0.52±0.11	≤6.35	0.60±0.07	100	250
THSS-GP2-19	19	20.1±0.40	32.2±0.6	0.53±0.11	≤9.53	0.62±0.07	100	250
THSS-GP2-25	25	26.7±0.45	42.5±0.7	0.55±0.12	≤12.7	0.63±0.07	100	250
THSS-GP2-38	38	39.8±0.51	63.2±0.8	0.57±0.12	≤19.1	0.64±0.07	50	250
THSS-GP2-51	51	53.0±0.56	83.9±0.9	0.58±0.13	≤25.4	0.64±0.08	50	250
THSS-GP2-76	76	79.4±0.56	125.3±1.0	0.59±0.1	≤38	0.64±0.09	50	250
Shrink Ratio 3:1								
THSS-GP3-1.6	1.6	2.00±0.20	3.7±0.3	0.47±0.10	≤0.53	0.52±0.06	100	250
THSS-GP3-2.4	2.4	2.79±0.20	5.0±0.3	0.47±0.10	≤0.79	0.57±0.06	100	250
THSS-GP3-3.2	3.2	3.64±0.23	6.3±0.4	0.48±0.10	≤1.06	0.61±0.06	100	250
THSS-GP3-4.8	4.8	5.26±0.25	8.9±0.4	0.49±0.10	≤1.59	0.67±0.06	100	250
THSS-GP3-6.4	6.4	6.92±0.28	11.5±0.4	0.50±0.10	≤2.36	0.71±0.06	100	250
THSS-GP3-9.5	9.5	10.2±0.32	16.7±0.5	0.52±0.11	≤3.18	0.77±0.06	100	250
THSS-GP3-12.7	12.7	13.5±0.36	21.8±0.6	0.53±0.11	≤4.75	0.80±0.07	100	250
THSS-GP3-19	19	20.1±0.40	32.2±0.6	0.55±0.11	≤6.35	0.84±0.07	100	250
THSS-GP3-25	25	26.7±0.45	42.5±0.7	0.56±0.12	≤8.47	0.86±0.07	100	250
THSS-GP3-38	38	39.8±0.51	63.2±0.8	0.57±0.12	≤12.9	0.89±0.07	50	250
THSS-GP3-51	51	53.0±0.56	83.9±0.9	0.57±0.13	≤17.2	0.90±0.08	50	250
THSS-GP3-76	76	79.4±0.56	125.3±1.0	0.57±0.13	≤25.8	0.92±0.09	50	250

Notes: Special sizes or colors available on request.