



Connect and Protect

TransTechnical Solutions

Technical Data Sheet

Non-Metallic Systems

End Boot—Type GZ

Technical Characteristics

Conforms to N/A

Approvals and Standards N/A

Degree of mechanical protection Low

UV protection High

Fitting Characteristics Tapered rubber sealing system

Normal operating temperature range	Application	Min Temp	Max Temp	Use of Ty-Rap Recommended
	Static	- 30°C	+120°C	
	Dynamic	- 30°C	+120°C	

For use with - Conduit Series Light, Standard and Heavyweight variants of type PA, PI, CP, PADL & PF

Fire performance	Test Standard	Performance Rating
	Not Rated	Not Rated

Testing data N/A

Type of material Polychloroprene Rubber

Finish Black (BL) only

Image



011 974 9671

sales@ttsafrica.com

Unit F11, Roete 24, 50 Herman Street, Meadowdale, Germiston, South Africa



Connect and Protect

TransTechnical Solutions


Technical Data Sheet

Non-Metallic Systems

End Boot—Type GZ

Dimensional Data

Part No	For Nominal Conduit Size	Dimensions mm
	A	B
TGZ10	10	25.0
TGZ13	13	28.0
TGZ16	16	35.0
TGZ21	21	43.0
TGZ25	25	50.0
TGZ28	28	50.0
TGZ34	34	55.0
TGZ42	42	42.0
TGZ54	54	50.0
TGZ67	67	55.0

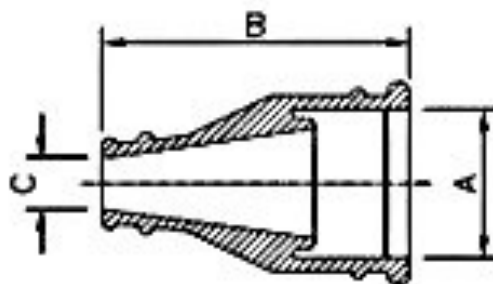

011 974 9671

sales@ttsafrica.com

Unit F11, Roete 24, 50 Herman Street, Meadowdale, Germiston, South Africa