

Military Grade Heat Shrink Marker Sleeve 2:1 and 3:1

Product Introduction:

Military Grade Heat Shrink Marker Sleeve is made from durable, flame retarded, radiation cross-linked heat-shrinkable polyolefin.

Features:

- ✓ Thermal transfer printable in single sided or double sided
- ✓ 2:1 or 3:1 shrink ratio
- ✓ Used in a widely applications including aerospace, military, motor sports and oil & gas
- ✓ Supplied in a "Ladder Format" or "Continuous Length"
- ✓ Scoring is available if request in advance

Operating temperature	Minimum shrink temperature	Minimum full recovery temperature
-55°C to +135°C	90°C	130 °C

Standard Color: White, Yellow.

Specifications:


SAE-AMS-DTL-23053/5

UL 224

SAE-AS 81531

MIL-STD-202F/Method

215J RoHS/REACH

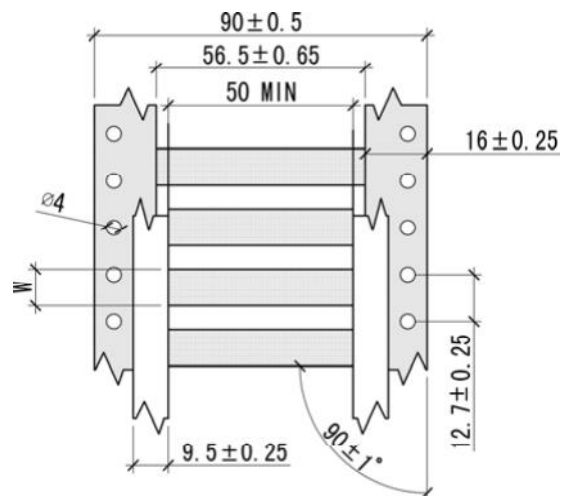

Military Grade Heat Shrink Marker Sleeve 2:1 and 3:1 Dimensions:

Part Number	Size (mm)	Before Shrink (mm)			After Shrink (mm)		Packing Options	
	mm	I.D.	Flat Width	Double Wall Thickness	I.D.	Single Wall Thickness	M/Reel	PCS/Box
Shrink Ratio: 2:1								
THSS-MG2-1.6	1.6	2.00±0.20	3.7±0.3	0.48±0.10	≤0.79	0.45±0.06	100	250
THSS-MG2-2.4	2.4	2.79±0.20	5.0±0.3	0.48±0.10	≤1.18	0.49±0.06	100	250
THSS-MG2-3.2	3.2	3.64±0.23	6.3±0.4	0.48±0.10	≤1.59	0.51±0.06	100	250
THSS-MG2-4.8	4.8	5.26±0.25	8.9±0.4	0.48±0.10	≤2.36	0.54±0.06	100	250
THSS-MG2-6.4	6.4	6.92±0.28	11.5±0.4	0.50±0.10	≤3.18	0.56±0.06	100	250
THSS-MG2-9.5	9.5	10.2±0.32	16.7±0.5	0.51±0.11	≤4.75	0.59±0.06	100	250
THSS-MG2-12.7	12.7	13.5±0.36	21.8±0.6	0.52±0.11	≤6.35	0.60±0.07	100	250
THSS-MG2-19	19	20.1±0.40	32.2±0.6	0.53±0.11	≤9.53	0.62±0.07	100	250
THSS-MG2-25	25	26.7±0.45	42.5±0.7	0.55±0.12	≤12.7	0.63±0.07	100	250
THSS-MG2-38	38	39.8±0.51	63.2±0.8	0.57±0.12	≤19.1	0.64±0.07	50	250
THSS-MG2-51	51	53.0±0.56	83.9±0.9	0.58±0.13	≤25.4	0.64±0.08	50	250
THSS-MG-276	76	79.4±0.56	125.3±1.0	0.59±0.13	≤38.1	0.64±0.09	50	250
Shrink Ratio: 3:1								
THSS-MG3-1.6	1.6	2.00±0.20	3.7±0.3	0.47±0.10	≤0.53	0.52±0.06	100	250
THSS-MG3-2.4	2.4	2.79±0.20	5.0±0.3	0.47±0.10	≤0.79	0.57±0.06	100	250
THSS-MG3-3.2	3.2	3.64±0.23	6.3±0.4	0.48±0.10	≤1.06	0.61±0.06	100	250
THSS-MG3-4.8	4.8	5.26±0.25	8.9±0.4	0.49±0.10	≤1.59	0.67±0.06	100	250
THSS-MG3-6.4	6.4	6.92±0.28	11.5±0.4	0.50±0.10	≤2.36	0.71±0.06	100	250
THSS-MG3-9.5	9.5	10.2±0.32	16.7±0.5	0.52±0.11	≤3.18	0.77±0.06	100	250
THSS-MG3-12.7	12.7	13.5±0.36	21.8±0.6	0.53±0.11	≤4.75	0.80±0.07	100	250
THSS-MG3-19	19	20.1±0.40	32.2±0.6	0.55±0.11	≤6.35	0.84±0.07	100	250
THSS-MG3-25	25	26.7±0.45	42.5±0.7	0.56±0.12	≤8.47	0.86±0.07	100	250
THSS-MG3-38	38	39.8±0.51	63.2±0.8	0.57±0.12	≤12.9	0.89±0.07	50	250
THSS-MG3-51	51	53.0±0.56	83.9±0.9	0.57±0.13	≤17.2	0.90±0.08	50	250
THSS-MG3-76	76	79.4±0.56	125.3±1.0	0.57±0.13	≤25.8	0.92±0.09	50	250

Notes: Special sizes or colors available on request.