

Anode Cap

Product Introduction:

An anode cap seals and protects the critical connection between lead wire and anode. It is the ideal solution to the problem of premature system failure due to loss of the wire to anode termination.

Features:

- Excellent electrical insulation
- Moisture proof
- RoHS compliant

Operating temperature	Minimum shrink temperature	Minimum full recovery temperature
-55°C to +105°C	100°C	110°C




Standard Color: Black.

Technical Data:

Property		Test Method	Typical Data
Physical	Tensile Strength	ASTM D 638	≥12 Mpa
	Elongation	ASTM D 638	≥300%
	Tensile strength after aging	ASTM D 638 168hrs at 130°C	≥10 Mpa
	Elongation after aging	ASTM D 638 168hrs at 130°C	≥200%
Electrical	Dielectric Strength	IEC 60243	≥15 kV/mm
	Volume Resistivity	IEC 93	≥10 ¹³ Ω.cm
	Stress Cracking Resistance	ASTM D 1693	No cracking
Chemical	Water Absorption	ISO 62	≤0.5%
	Fungus and Decay Resistance	ISO 846	Pass

Anode Cap

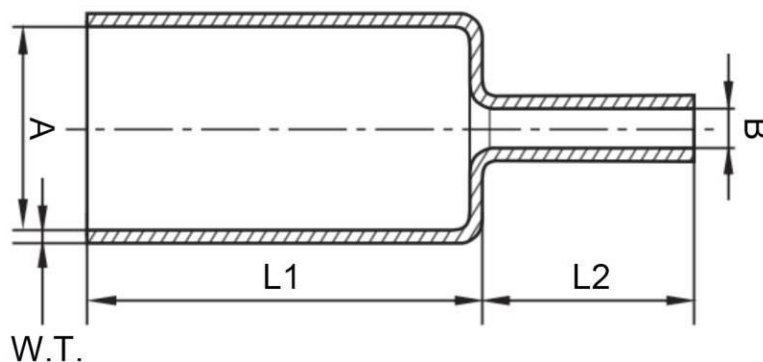

Dimensions:

Part number	As supplied		After recovery (mm)			L1.Min (mm)	L2.Min (mm)
	A-Min.ID	B-Min. ID	A-Max.ID	B-Max. ID	W.T.		
TAC-68/48	68	12	48	7	2.3	76	78
TAC-87/62	87	12	63	7	2.5	102	78
TAC-120/86	120	13	86	7	2.5	102	78
TAC-114/86	114	12	86	7	2.5	102	78
TAC-50/30	50	20	30	6.5	3.0	45	105
TAC-86/42	86	16.8	42	6.5	3.0	152	80
TAC-112/58	112	16.8	58	6.5	3.0	152	80

Note: Printing, special sizes available on request.