

Trans Technical Solutions

Tel: +27 11 974 9679
Fax: +27 11 974 9653
Email: sales@ttsafrica.com



P O Box 5094
Delmenville
1403

Unit F11, Roete 24
Meadowdale
Germiston





Female and Male Cable Coupler MC4-Evo2 (1 500V DC) Female and Male Cable Coupler as Individual Part (including insulating part)

T/PV-KBT4-EVO 2/...-UR

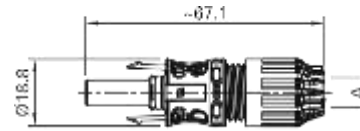

T/PV-KST4-EVO 2/...-UR

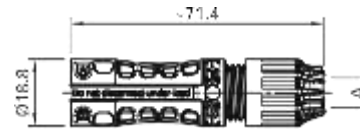

Part No	Female cable coupler	Male cable coupler	Ø range of cable gland	Conductor cross section			Approvals
			A (mm)	mm²	AWG	b (mm)	
T/PV-KBT4-EVO 2/2,5I-UR	x		4.7-6.4	2.5	14	3	TÜV   
T/PV-KST4-EVO 2/2,5I-UR		x					
T/PV-KBT4-EVO 2/6I-UR	x		4.7-6.4	4; 6	12; 10	5	
T/PV-KST4-EVO 2/6I-UR		x					
T/PV-KBT4-EVO 2/10II-UR	x		6.4-8.4	10	8	7.2	
T/PV-KST4-EVO 2/10II-UR		x					

- Internationally certified with IEC, UL, JET, cTÜVus.
- Approved for 1500 V DC (IEC, JET), 1500 V DC (UL) unrestricted access
- MULTILAM Technology, has proven the quality and durability several 100 million times since 2004
- Suited for all climatic environments thanks to resistance to UV, ammonia, and high IP class (IP68).
- Available as a field and pre-assembled connector, standard crimping tools can be used.
- Mating compatibility with MC4 connector family

Female and Male Cable Coupler MC4-Evo2 (1 500V DC) Female and Male Cable Coupler as Individual Part (including insulating part)

Technical data	
Connector system	Ø 4 mm
Rated voltage	1500 V DC (TÜV) ¹⁾ 1500 V DC (UL) ²⁾ 1500 V DC (JET) ³⁾
Rated current TÜV (85°C)	39 A (2,5 mm ² / 14 AWG) 45 A (4,0 mm ² / 12 AWG) 53 A (6,0 mm ² / 10 AWG) 69 A (10,0 mm ² / 8 AWG)
Rated impulse voltage	16 kV (1500 V)
Ambient temperature range	-40°C ... +85°C (TÜV / UL)
Upper limiting temperature	115°C (TÜV)
Degree of protection, mated unmated	IP65/IP68 (1h/1m) IP2X
Overvoltage category / Pollution degree	CAT III / 3
Contact resistance of plug connectors	≤ 0.2 mΩ
Safety class	II
Contact system	MULTILAM
Type of termination	Crimping
Contact material	Copper, tin plated
Insulation material	PA
Locking system (UL)	Locking type
Flame class	UL94-V0
Ammonia resistance (acc. to TÜV)	Q60095359
Salt mist spray test, degree of severity 6	IEC 60068-2-52
TÜV-Rheinland certified, in accordance with IEC 62852 UL recognized component, in accordance with UL 6703 cTÜVus certified according UL 6703 JET certified according IEC 61730-1:2004	R60127169 E343181 CU 72141256 01 B13T0062

- 1) Please take the cable to be used from MA273
- 2) The connectors are to be used with USE2 or PV-Wire cables.
- 3) The connectors are to be used with cables with the "S-JET mark" label.