


## CCSB Conduit Clip

Circular conduit clips to provide a secure closing for conduits and reducing function for fitting entries allowing smaller conduits to be installed securely in larger openings. Certain options can be stacked to further reducer openings

**Material:** Polyamide 6 (Nylon) - UV Resistant - Heat Stabilised

**Temperature range:** Normal use -40°C to +120°C

**Colour:** Black as standard

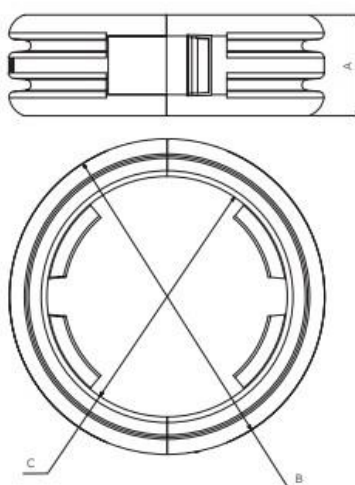

| Part Number     | Dimensions |        |        | For conduit           | Fits Outlet CCSB Reducer      |
|-----------------|------------|--------|--------|-----------------------|-------------------------------|
|                 | A          | B      | C      |                       |                               |
| <b>T/CCSB08</b> | 8.1mm      | 16.0mm | 10.5mm | <b>T/NC08 / NW7.5</b> | <b>T/NC16/NW13 T/CCSB16</b>   |
| <b>T/CCSB10</b> | 9.5mm      | 19.4mm | 12.1mm | <b>T/NC10 / NW8.5</b> |                               |
| <b>T/CCSB12</b> | 9.5mm      | 20.8mm | 13.6mm | <b>T/NC12 / NW10</b>  | <b>T/NC20/NW17 T/CCSB20</b>   |
| <b>T/CCSB16</b> | 9.3mm      | 20.9mm | 16.8mm | <b>T/NC16 / NW13</b>  | <b>T/NC20/NW17 T/CCSB20</b>   |
| <b>T/CCSB20</b> | 9.0mm      | 27.8mm | 21.7mm | <b>T/NC20 / NW17</b>  | <b>T/NC28/NW23 T/CCSB28</b>   |
| <b>T/CCSB25</b> | 10.2mm     | 34.2mm | 26.4mm | <b>T/NC25 / NW22</b>  | <b>T/NC32 / NW29 T/CCSB32</b> |
| <b>T/CCSB28</b> | 10.2mm     | 36.0mm | 29.0mm | <b>T/NC28 / NW23</b>  |                               |
| <b>T/CCSB32</b> | 11.5mm     | 42.2mm | 35.1mm | <b>T/NC32 / NW29</b>  | <b>T/NC40/NW36 T/CCSB40</b>   |
| <b>T/CCSB40</b> | 11.5mm     | 53.8mm | 43.1mm | <b>T/NC40 / NW36</b>  | <b>T/NC50/NW48 T/CCSB50</b>   |
| <b>T/CCSB50</b> | 11.5mm     | 62.3mm | 55.4mm | <b>T/NC50 / NW48</b>  |                               |

# Trans Technical Solutions

Tel: +27 11 974 9679  
Fax: +27 11 974 9653  
Email: sales@ttsafrica.com

P O Box 5094  
Delmenville  
1403



Unit F11, Roete 24  
Meadowdale  
Germiston



## CCSB Conduit Clip

### Option: Single Clip Outlet Reductions

| From – Outlet Size | To – Conduit Size | Conduit Clip PA66 |
|--------------------|-------------------|-------------------|
| T/NC16 / NW13      | T/NC08 / NW7.5    | T/CCSB08          |
| T/NC20 / NW17      | T/NC12 / NW10     | T/CCSB12          |
| T/NC20 / NW17      | T/NC16 / NW13     | T/CCSB16          |
| T/NC28 / NW23      | T/NC20 / NW17     | T/CCSB20          |
| T/NC32 / NW29      | T/NC25 / NW22     | T/CCSB25          |
| T/NC40 / NW36      | T/NC32 / NW29     | T/CCSB40          |
| T/NC50 / NW48      | T/NC40 / NW36     | T/CCSB50          |

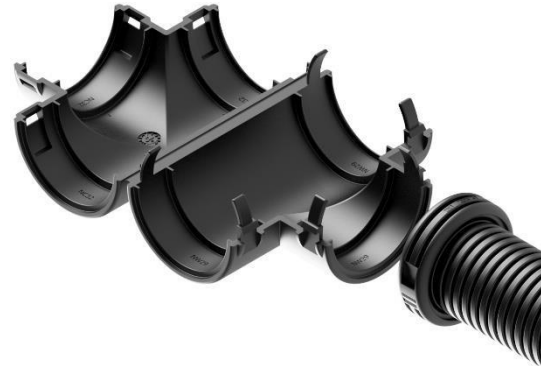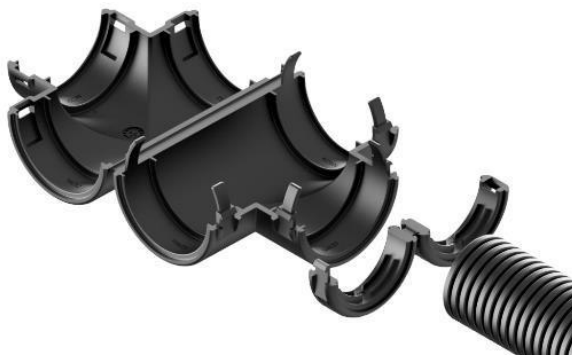

# Trans Technical Solutions

Tel: +27 11 974 9679  
Fax: +27 11 974 9653  
Email: [sales@ttsafrica.com](mailto:sales@ttsafrica.com)

P O Box 5094  
Delmenville  
1403

Unit F11, Roete 24  
Meadowdale  
Germiston



## CCSB Conduit Clip

### Option: Double Clip Outlet Reductions

| From – Outlet Size | To – Conduit Size | Conduit Clips PA66  |
|--------------------|-------------------|---------------------|
| T/NC20 / NW17      | T/NC08 / NW7.5    | T/CCSB16 + T/CCSB08 |
| T/NC28 / NW23      | T/NC12 / NW10     | T/CCSB20 + T/CCSB12 |
| T/NC28 / NW23      | T/NC16 / NW13     | T/CCSB20 + T/CCSB16 |
| T/NC40 / NW36      | T/NC25 / NW22     | T/CCSB32 + T/CCSB25 |



# Trans Technical Solutions

Tel: +27 11 974 9679  
Fax: +27 11 974 9653  
Email: sales@ttsafrica.com

P O Box 5094  
Delmenville  
1403


Unit F11, Roete 24  
Meadowdale  
Germiston



## CCSB Conduit Clip

### Option: Triple Clip Outlet Reductions

| From –<br>Outlet Size | To –<br>Conduit Size | Conduit Clips PA66             |
|-----------------------|----------------------|--------------------------------|
| T/NC28 / NW23         | T/NC08 / NW7.5       | T/CCSB20 + T/CCSB16 + T/CCSB08 |

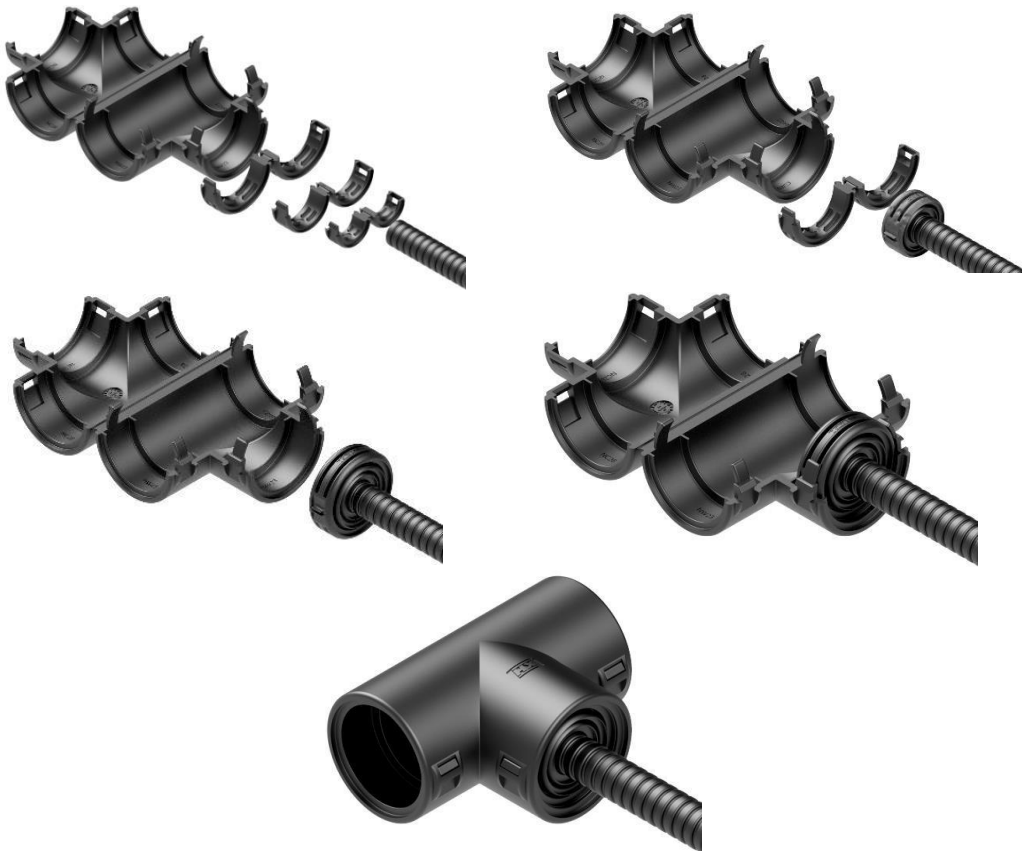

# Trans Technical Solutions

Tel: +27 11 974 9679  
Fax: +27 11 974 9653  
Email: [sales@ttsafrica.com](mailto:sales@ttsafrica.com)

P O Box 5094  
Delmenville  
1403

Unit F11, Roete 24  
Meadowdale  
Germiston



## CCSB Conduit Clip

### Features and Benefits

- Internal ribs to aid conduit retention
- External grooves to allow stacking
- Single piece clip for ease of installation when used as security rings for slit conduit
- Prevents slit conduit opening
- Securely closes slit conduit
- Improves crush strength of slit conduits

### Applications

- Provides a means to close slit conduits
- Reducing conduit outlets to allow smaller conduits to be used
- Can be stacked to enable further reduction in conduit size

### Fittings

- TPS - T Piece conduit manifold
- YPS - Y Piece conduit manifold
- JPS - Straight conduit joiner
- EPS - Conduit elbow
- CI - Conduit to connector interfaces