

Saddle support mounting base

Polyamide 6.6

Heat Stabilised Polyamide 6.6


Transtech Solutions
 Unit F11 Roete 24, 50 Herman Street
 Meadowdale, Germiston
 Tel: 011 974 9679
 Fax: 011 974 9653



- Tie mounting bases with supporting saddle
- For screw- or rivet-mounting
- The prism-shape of the saddle prevents twisting around the fixture
- High strength through compact design
- Non-conductive, non-corrosive, resistant to fuels, lubricants and most chemicals
- Available in UV-resistant, heat stabilised black version

Technical Information

Material	Polyamide 6.6 or heat stabilised Polyamide 6.6
Temperature range	-40°C to +85°C (Natural) -40°C to +105°C (UV-resistant black)
Colour	Natural or UV-resistant black
Mounting method	Screw or rivet
Flammability rating	UL 94 V-2
Other properties	Halogen free, Silicone free, UV-resistant black

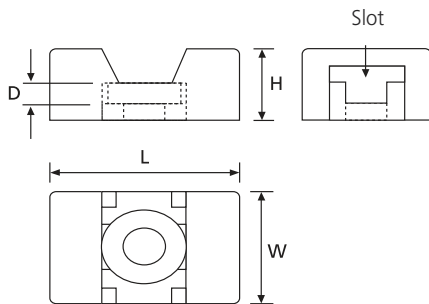

Product Ref.	Colour	Dimensions				For tie width up to [mm]	Mounting hole diameter [mm]	Quantity [pieces]
		H [mm]	W [mm]	L [mm]	D [mm]			
TSMNY-001-9-D	natural	7.1	9.8	15.2	4.7	4.8	4.2	500
TSMNY-001-0-D	UV-resistant black heat stabilised	7.1	9.8	15.2	4.7	4.8	4.2	500

For other colours and quantities please contact your Sales Office