

MEDIUM VOLTAGE

MEDIUM VOLTAGE

MEDIUM VOLTAGE

- ## MEDIUM VOLTAGE

MEDIUM VOLTAGE

MEDIUM VOLTAGE

- ## MEDIUM VOLTAGE

MEDIUM VOLTAGE


MEDIUM VOLTAGE

MEDIUM VOLTAGE

- ## MEDIUM VOLTAGE

MEDIUM VOLTAGE



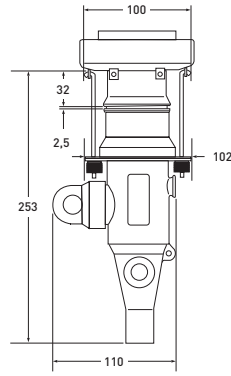

TSD

Straight separable termination kit

Deadbreak - Max current 250 A



Single-core MV cables up to 24 kV

Selection table

item	Conductor cross-section (mm ²)	Cable insulation diameter min – max (mm)
TSD250-16/A	16	13.5 – 17.4
TSD250-16/B		16.3 – 20.8
TSD250-25/A	25	13.5 – 17.4
TSD250-25/B		16.3 – 20.8
TSD250-35/A	35	13.5 – 17.4
TSD250-35/B		16.3 – 20.8
TSD250-35/C		19.6 – 24.1
TSD250-50/A	50	13.5 – 17.4
TSD250-50/B		16.3 – 20.8
TSD250-50/C		19.6 – 24.1
TSD250-70/A	70	16.3 – 20.8
TSD250-70/B		19.6 – 24.1
TSD250-95/A	95	16.3 – 20.8
TSD250-95/B		19.6 – 24.1

Structural details

1. Pressure plug connector
2. Internal deflector
3. Insulator
4. Earthing eye
5. External screen
6. Cable entrance
7. Optional locking ring groove
8. Capacitive test point
9. Cone baffle

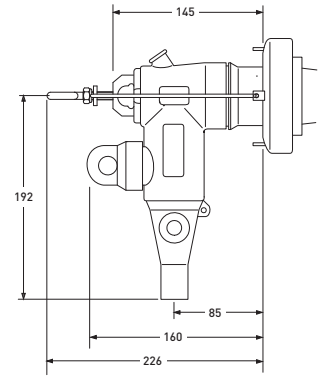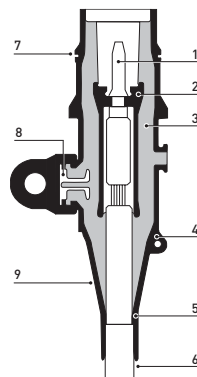

TSS

Separable elbow termination kit

Deadbreak - Max current 250 A

Single-core MV cables up to 24 kV

Selection table

item	Conductor cross-section (mm ²)	Cable insulation diameter min – max (mm)
TSS250-16/A	16	13.5 – 17.4
TSS250-16/B		16.3 – 20.8
TSS250-25/A	25	13.5 – 17.4
TSS250-25/B		16.3 – 20.8
TSS250-35/A	35	13.5 – 17.4
TSS250-35/B		16.3 – 20.8
TSS250-35/C		19.6 – 24.1
TSS250-50/A	50	13.5 – 17.4
TSS250-50/B		16.3 – 20.8
TSS250-50/C		19.4 – 24.1
TSS250-50/D		23.1 – 28.7
TSS250-70/A	70	16.3 – 20.8
TSS250-70/B		19.6 – 24.1
TSS250-70/C		23.1 – 28.7
TSS250-95/A	95	16.3 – 20.8
TSS250-95/B		19.4 – 24.1
TSS250-95/C		23.1 – 28.7
TSS250-95/D		27.9 – 33.5
TSS250-120/A	120	19.6 – 24.1
TSS250-120/B		23.1 – 28.7
TSS250-120/C		27.9 – 33.5

Structural details

1. Pressure plug connector
2. Internal deflector
3. Insulator
4. Earthing eye
5. External screen
6. Cable entrance
7. Optional locking ring groove
8. Capacitive test point
9. Cone baffle
10. Pulling eye

