

Metallic Systems

SPLHC Conduit

Technical Characteristics

Conforms to	BSI Kitemark KM-35161 Low voltage directive		
Approvals and Standards	 		
Degree of mechanical protection	Medium flexibility & fatigue life		
Degree of protection	IP69k - with TSPL type M fitting IP68 - with TSPL type M fitting IP67 - with TSPL type A, B & M fittings IP66 - with TSPL type M & C90 fittings		
UV protection	Very High		
Finish	Black		
Application	Liquid tight - Extreme temperature environments		
Normal operating temperature range	Application	Min Temp	Max Temp
	Static	- 65°C	+135°C
	Dynamic	- 45°C	+150 °C
For use with - Fitting range	Type A , B , E , M C90 & 45		
Fire performance	Test Standard	Performance Rating	
	Not Rated	Not Rated	
		(See Fire testing data for fire performance overview)	
Testing data	See pages 3 & 4		
Type of material	Galvanised steel core - string packing with thermoplastic rubber covering		
Image			


Metallic Systems

SPLHC Conduit

Technical & Dimensional Data

Conduit size metric (mm)	10	12	16	20	25	32	40	50	63	75
Conduit size US trade (inches)	1/4"	5/16"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"
Part code	TSPLHC	TSPLHC	TSPLHC	TSPLHC	TSPLHC	TSPLHC	TSPLHC	TSPLHC	TSPLHC	-
Coil length (m)	25/50	25/50	25	25	25	25	25	25	25	-
A - Outside diameter (mm)	11.8	14.2	17.8	21.1	26.4	33.1	41.8	47.9	59.7	-
B - Inside diameter (mm)	7.0	12.0	12.5	15.9	21.0	26.7	35.4	40.4	51.6	-
C - Static bend radius (mm)	40	45	50	80	110	145	180	240	345	-
Average weight (Kg/100m)	16	22	31	40	48	68	108	115	150	-

For ordering code add coil length to part code - e.g TSPLHC25/BL/25M

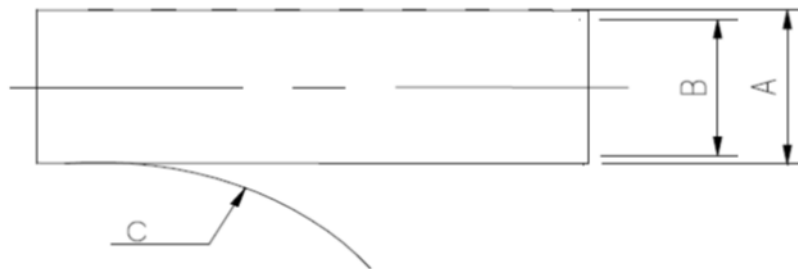

Metallic Systems SPLHC Conduit

BS EN 61386 Clarification

	Fitting	Compression	Impact	Min temp	Max temp	bending	electrical	IP solids	IP water	Corrosion	Tensile	Non-flame Propagating	Suspended load
TSPLHC	TSPL(M)	4	4	5	5	4	0	6	7	-	4	1	5

Mechanical Properties

Test Type	Methods / Standards	Requirements	Value
Crush Strength @ 23°C	IEC61386-1	<25% crush >90% recovery	>1250N
Crush Strength @ 23 °C	AFX norm C1989	10% Crush, Instantaneous Value	2500N
Impact Strength @ 23 °C	IEC61386-1	No Cracks <20% deformation	>20J
Impact Strength @-45 °C	IEC61386-1	No Cracks. <20% deformation	>6J
Tensile Strength	IEC61386-1	With M Type Fitting	>1000N class 4
Tensile Strength	AFX norm T1987	Ultimate pull-out of M-Type Fitting	1600N
Dynamic Bend radius @ -45 °C	IEC61386-23	5000 cycles minimum	120mm

Thermal Properties

Test Type	Methods / Standards	Requirements	Value
Minimum Temperature	IEC61386-23	Dynamic 5000 cycles	-65°C
Maximum Temperature	IEC61386-23	Dynamic 5000 cycles	135°C
Minimum Static		Permanent Use	-65°C
Maximum Static		Permanent Use	135°C

Chemical Resistance Chart

Key:

Suitable :



Limited Suitability :



Unsuitable :



Not Tested :



● Astm No.1	● Diesel oil	● Methyl Bromide	● Sulphur Dioxide (Gas)
● Astm No.2	● Diethylamine	● MEK	● Sulphuric Acid (10%)
● Astm No.3	● Ethanol	● Nitric Acid (10%)	● Sulphuric Acid (70%)
● Acetic Acid (10%)	● Ether	● Nitric Acid (70%)	● Toluene
● Acetone	● Ethylamine	● Oxalic Acid	● Transformer Oil
● Aluminium Chloride	● Ethylene Glycol	● Ozone (Gas)	● 1,1,1-Trichloroethane
● Aniline	● Ethyl Ethanoate	● Paraffin oil	● Trichloroethylene
● Benzaldehyde	● Freon 32	● Petrol	● Turpentine
● Benzene	● Hydrochloric Acid (10%)	● Phenol	● Vegetable Oil
● Carbon tetrachloride	● Hydrochloric Acid (36%)	● Sea Water	● Vinyl Acetate
● Chlorine water	● Hydrogen Peroxide (35%)	● Silver Nitrate	● Water
● Chloroform	● Hydrogen Peroxide (87%)	● Skydrol	● White Spirit
● Citric Acid	● Lactic Acid	● Sodium Chloride	● Zinc Chloride
● Copper Sulphate	● Lubricating oil	● Sodium Hydroxide (10%)	
● Cresol	● Methanol	● Sodium Hydroxide (60%)	

The information above is given as a guide only and is based on published technical data and experience. The chemical resistance of the above products is dependant on factors such as chemical exposure, concentration of the chemical and temperature. The above chemicals are valid for a temperature of 23°C. Use of the above table is at the users own discretion and risk. Those using it must satisfy themselves that their application presents no health and safety risks. The end user should assess compatibility with their application and contact TTS for further information.

ADHERENCE TO THE CURRENT WIRING REGULATIONS BS7671 OR NEC WIRING REGULATIONS (FOR USA) IS STRONGLY ADVISED.

MINIMUM BEND RADIUS FOR FLEXING IS DEPENDANT UPON MINIMUM TEMPERATURE, BENDING FREQUENCY AND CHEMICAL ENVIRONMENT.

Metallic Systems

SPLHC Conduit

Flammability

Test Type	Method / Standard	Requirement	Result	Unit
Oxygen Index	ISO 4589-2	% Oxygen to support combustion	22	%
Glow Wire Rating	IEC 60695	No Ignition to Extinguish with 30s	750	°C
Flammability	UL94	Vertical (V0, V2) or Horizontal (HB)	V2	
Flammability	IEC 61386-1	1Kw Burner @ 45°	Pass	Pass/Fail
FTI	ISO 4589-3		N/A	

Smoke

Test Type	Method / Standard	Requirement	Result	Unit
Smoke Density	ATS1000	In flaming mode <100 @ 4 mins	N/A	
Smoke Density	ATS1000	In non flaming mode <100 @ 4 mins	N/A	
Smoke Density	BS6853	A <0.02	N/A	
Smoke Density	ASTM E-662	Flaming mode Ds Max	N/A	
Smoke Density	ISO - 5659-2	Ds Max	N/A	

Toxicity

Test Type	Method / Standard	Requirement	Result	Unit
Halogen Free		<0.5%	Yes	Yes/No
Phosphorous Free		<0.5%	Yes	Yes/No
Sulphur Free		<0.5%	Yes	Yes/No

Fire Performance Overview

Property	Low Fire Hazard	Enhanced Low Fire Hazard	Super Low Fire Hazard	Inherent Low Fire Hazard
Property				
Oxygen Index ISO4589	32% ≥ OI ≥ 28%	OI ≥ 32%	OI ≥ 32%	Inherent Low Fire
BS6853 Smoke Density 3m³	0.02 ≤ A _s ≤ 0.03	0.0005 ± A _s ≤ 0.02	A _s ≤ 0.005	Hazard i.e
Zero Halogen	✓	✓	✓	Type , S, SS
Zero Phosphorus	✓	✓	✓	Metallic Conduit & Fit-
Zero Sulphur	✓	✓	✓	tings
NFF16-102	I3F2	I2F2	I2F1	
EN45545-2	HL2	HL3	HL3	

Pre Test Conditions

Duration	Standard	Temperature	Relative Humidity
168 (Hours)	EN50086/IEC61386	23 (°C)	50 (%)